

B-V8MA202208

SMART IN ONE

Midea Building Technologies Division

Midea Group

Add.: Midea Headquarters Building, 6 Midea Avenue, Shunde, Foshan, Guangdong, China
Postal code: 528311

mbt.midea.com www.midea-group.com tsp.midea.com

Midea reserves the right to change the specifications of the product, and to withdraw or replace products without prior notification or public announcement. Midea is constantly developing and improving its products.



V8 VRF Master Series

8-120HP (Combinable series)

8-42HP (Individual series)



DISCOVER
RELIABLE COMFORT

HYPERLINK

Midea original communication bus chip greatly simplifies installation and saves installation cost.




Benefits

-  Flexible installation
-  Low installation cost
-  High reliability
-  Stable operation

HyperLink communication technology supports any wiring pattern rather than just daisy chain connection, reducing the installation cost and the possibility of incorrect connection. It has stronger anti-interference ability, achieving communication distance up to 2000m.


Support Any Topology Communication

In addition to the traditional daisy chain connection, the communication wire supports tree connection, star connection, ring connection and so on. The wiring is flexible, which greatly reduces the installation cost and has no possibility of wrong connection on site.

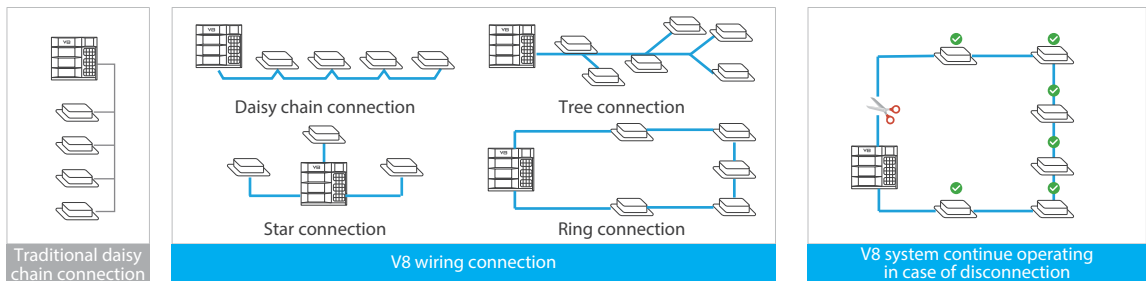


Super Anti-interference Capability

Special waveform restoration technology enhances anti-interference performance for more stable communication.

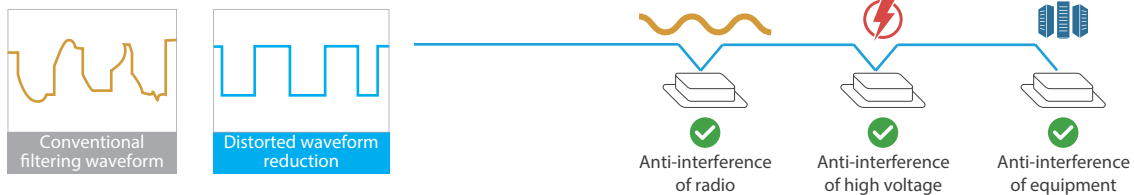

Flexible Power Supply for Indoor Units

HyperLink's unique communication method allows the indoor units to be powered not only by a uniform power supply, but also by individual and zone power supplies, making it particularly suitable for each shop in a large complex building, which can independently power on and off its own indoor units.

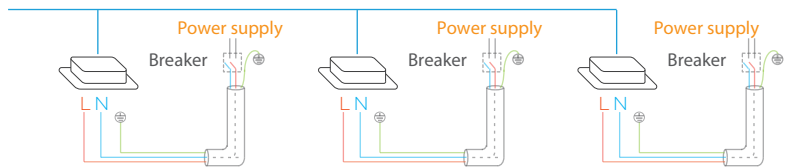

SHIELDBOX

IP55 fully enclosed electric control box provides all-round protection for internal electronic components, greatly improving system RELIABILITY.



Benefits

-  High reliability
-  Stable operation

■ IP (INGRESS PROTECTION)

IP	Dustproof grade code
	Prevent entry foreign objects and dust
55	Waterproof grade code
	Prevent water spray in all directions

Fully enclosed electronic components are isolated from the external environment to protect against corrosion, sand, humidity, snowstorm and other harsh conditions, and prevent small animals and insects from entering the chamber. To provide comprehensive protection for internal electronic devices, improve the overall environmental tolerance.

All Microchannel Refrigerant Cooling

All electronic components including inverter module, filter module and power module are cooled by specially designed microchannel refrigerant to ensure that the electronic components work in the best temperature range.




PTC Heater

The unique PTC heater, with precise temperature control sensor, can still ensure that the temperature inside the chamber is within the normal operating temperature range of electronic devices even in the low-temperature environment of -30°C.




Built-in Circulating Fan

The built-in circulating fan accelerates the air flow inside the chamber, and the heat exchange is more sufficient to ensure the consistent ambient temperature inside the chamber.

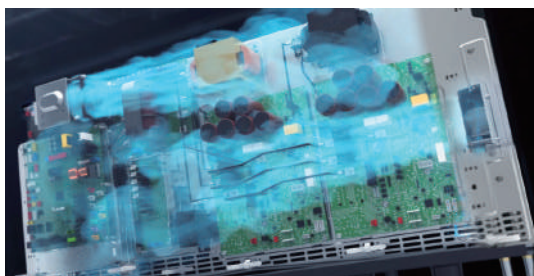

5 High Precision Temperature Sensors

5 high precision temperature sensors are used to accurately monitor the operation state of electronic control under various conditions to ensure that the internal temperature of the chamber is always controlled at 40-50°C.

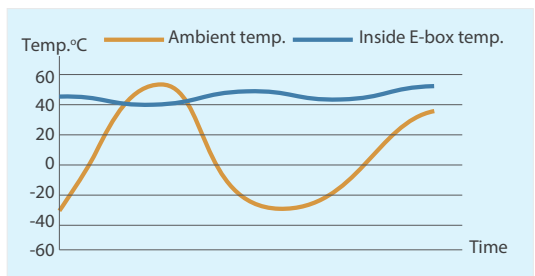

SUPERSENSE

The status of the refrigerant is known anywhere throughout the process, ensuring high **RELIABILITY** and **COMFORT**.




Benefits

- High reliability
- Stable operation
- Enhanced comfort

Up to 19 sensors are distributed throughout the refrigerant system, and the status of the refrigerant is known anywhere throughout the process, ensuring stable operation. At the same time, combined with the digital twin technology of the refrigerant system, a virtual sensor can be created in the event of a physical sensor failure, so that the system does not shut down in the event of a sensor failure, ensuring comfort.


Complete Sensors

The V8 Series VRF has the industry's most comprehensive range of 19 condition sensors with built-in data models for compressors, heat exchangers, throttling components and more. By analyzing sensor data in real time, it can sense the status of the refrigerant anywhere in the system.

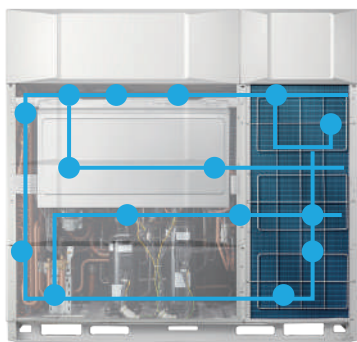

Refrigerant Amount Diagnosis*


Thanks to the complete sensors, the refrigerant running state is clearly visible, so as to accurately diagnose the amount of refrigerant.

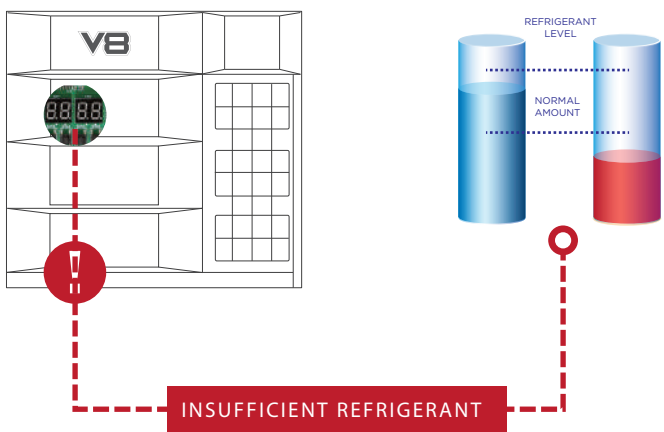

*Refrigerant Amount Diagnosis function will be available at the end of July.


Virtual Sensor Backup

In the event of a sensor failure, other sensors can automatically simulate a virtual backup sensor, so that the VRF system can continue to operate without stopping.



META 2.0

META is the abbreviation of Midea Evaporating Temperature Alteration. Further upgraded META technology to maximize ENERGY SAVING.

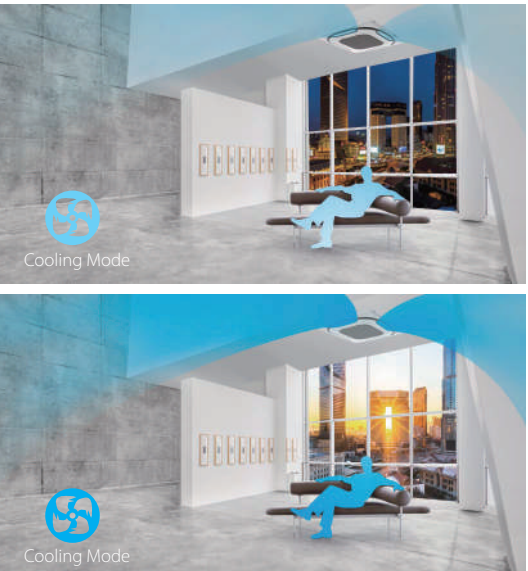

Benefits


- Energy saving
- Enhanced comfort
- Fast cooling/heating

Built-in professional operation and maintenance algorithm, so that the annual operation energy efficiency of each set of systems increased by more than 28%.

Variable Refrigerant Flow

STEP 1: Architectural space feature recognition


The indoor unit automatically recognizes the size of the building space and the effectiveness of the insulation according to the rate of temperature drop.

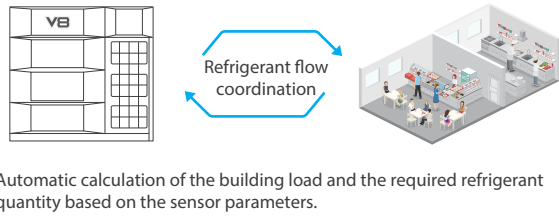

Variable Refrigerant Temperature

STEP 2: System refrigerant temperature determination




The system automatically matches the evaporating temperature (in cooling) or condensing temperature (in heating) to the room load to maximize comfort and energy efficiency.

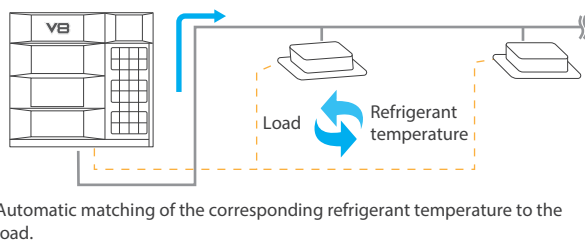

Variable Indoor Airflow

STEP 3: Adaptive indoor airflow and refrigerant flow

Each indoor unit automatically adjusts the corresponding indoor airflow and refrigerant flow according to the evaporating/condensing temperature, enabling precise temperature control.

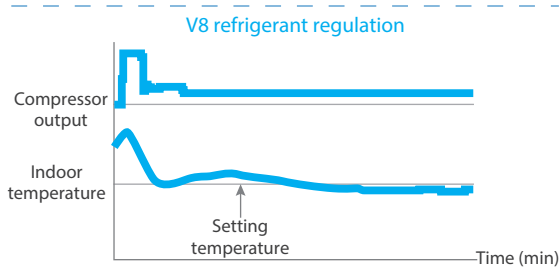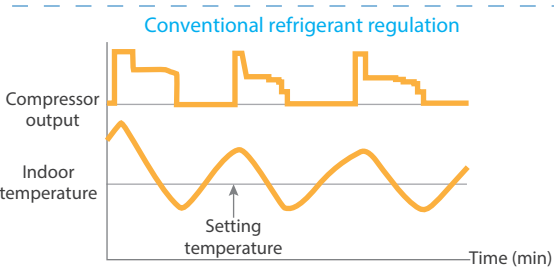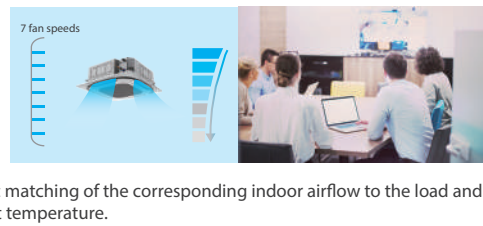

ZEN AIR 2.0

Further upgraded ZEN AIR technology to maximize COMFORT.



Benefits



Quiet



Enhanced comfort




Healthy

0.5°C temperature adjustment, 7 fan speeds selection, sleep mode, silent mode, windless technology, high efficiency filter, a variety of sterilization device and other advanced technologies used in V8 Series VRF are dedicated to creating a quiet, comfortable and healthy indoor environment.


360° Airflow

New design, round air flow path ensures uniform air flow and temperature distribution.

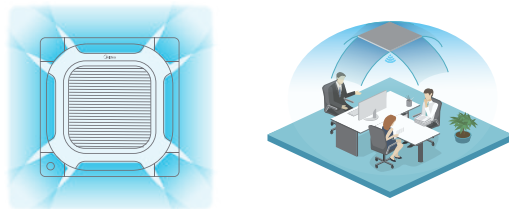


Individual Louver Control

The Individual louver control can control the motors separately, making it possible to control all four louvers independently.



Long Distance Air Delivery*


The Four-way Cassette has an additional 50Pa static pressure for long airflow delivery and is capable of being used in spaces up to 4.5m in floor height.

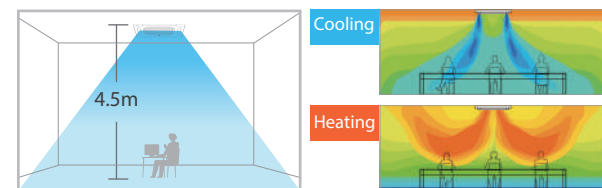

*This function is available as a customization option for V8 Four Way Cassette.

7 Fan Speeds

7 indoor fan speed options to meet the needs of different indoor conditions.

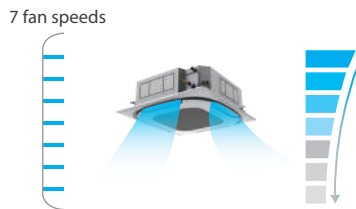

Sleep Mode

The smart sleep mode provides a comfortable sleep period and a refreshing wake up time.



Innovative Puro-air Kit

Protectors of health and safety

From Germany - OSRAM quality UV light source



1st The world's first air conditioning sterilization product certification
99.9% Effective killing rate of white grape fungus
99.9% Effective killing rate of H1N1
98% Effective killing rate of natural bacteria



Ozone -Free
UV leakage-Free

*The indoor unit needs to be customized in order to use the Puro-air Kit.

DOCTOR M 2.0

Further upgraded DOCTOR M technology to maximize EASY SERVICE.



Benefits



Easy maintenance



Fast maintenance



Low maintenance cost

Based on a cloud-based platform of big data and artificial intelligence, the V8 Series VRF can monitor the operation status of each unit in real time, predict system faults in advance and provide data analysis for system maintenance. Intelligent Bluetooth module and special Bluetooth after-sales kit can further simplify maintenance and improve maintenance efficiency.

Intelligent Maintenance Tool*

With intelligent Bluetooth module or special Bluetooth after-sales kit, the data of the outdoor unit can be directly read and written on your smart phone without the needs of connecting PC or opening cabinet.



*Bluetooth module is available as a customization option.

Real-time Monitoring of Operating Parameters

The V8 Series VRF synchronizes and stores all the unit parameters to the cloud through the data cloud gateway, including the running status, locking status, dirty blocking rate, all spot inspection parameters and so on. Users can query real-time and historical parameters on computers, tablets and mobile phones at any time.



*The data cloud gateway is still under development and needs to be purchased separately.



Cloud-based Big Data Analytics

Midea V8 VR transmits the system operation data to the cloud in real time through the data cloud gateway, and timely reminds the system of abnormal conditions through big data analysis, helping users to proactively avoid the risk of failure that has not yet occurred and minimize hidden problems.



FREE CONTROL

Intelligent control brings a new experience.

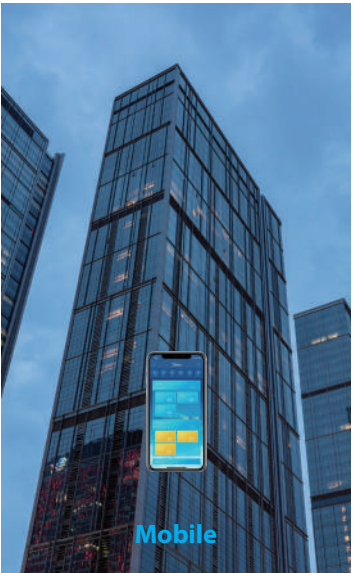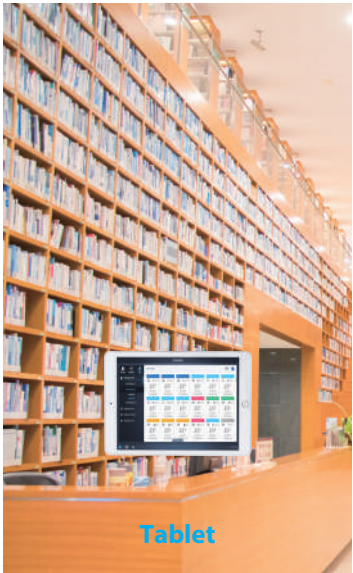

Benefits



Individual control




Central control



Cloud control

V8 Series VRF can provide different control solutions for different application scenarios. From small homes and convenience stores to large shopping malls and complex buildings, V8 Series VRF can provide the most appropriate control solutions to achieve centralized and customized management.

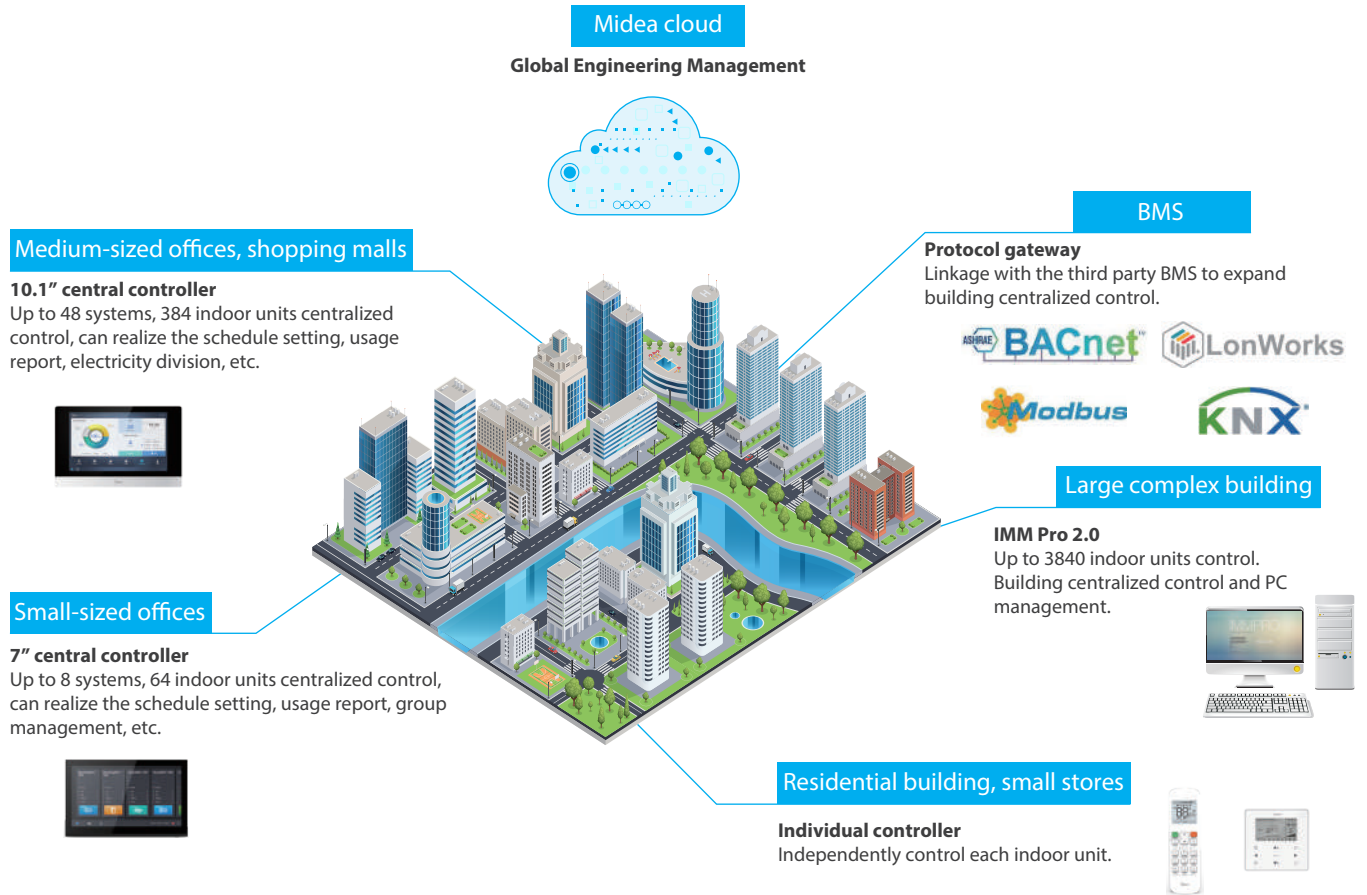

V8 UNIT LINEUP

Outdoor Unit - Combinable Series

HP	8-18	20-26	28-40
Single Unit			
HP	42-80	82-120	
Combined Unit			

Note: Four units combination are possible for the 8-24 HP models, for four units combination please contact Midea.

Outdoor Unit - Individual Series

HP	8-18	20-26	28-42
Single Unit			

V8 Indoor Unit

Type	One-way Cassette	Two-way Cassette	Compact Four-way Cassette	Four-way Cassette	Arc Duct	Medium Static Pressure Duct
Indoor Unit	 1.8-7.1kW, 7 models	 2.2-7.1kW, 6 models	 1.5-6.3kW, 7 models	 2.8-16kW, 11 models	 1.5-11.2kW, 10 models	 1.5-16kW, 12 models
Type	High Static Pressure Duct	Wall Mounted	Ceiling & Floor	Floor Standing	Floor Standing	Fresh Air Processing Unit
Indoor Unit	 7.1-56kW, 12 models	 1.5-9kW, 9 models	 3.6-14kW, 8 models	 2.2-7.1kW, 6 models	 22.4/28kW, 2 models	 11.2-56kW, 8 models

Note: The different series of indoor units are available in stages.
Pictures are for reference only, please refer to the actual product.

2nd Generation DC/AC Indoor Unit

Type	One-way Cassette	Two-way Cassette	Compact Four-way Cassette	Four-way Cassette	Medium Static Pressure Duct
Indoor Unit	 1.8-7.1kW, 7 models	 2.2-7.1kW, 6 models	 2.2-4.5kW, 5 models (DC) 1.8-4.5kW, 5 models (AC)	 2.8-16kW, 11 models (DC) 2.8-14kW, 10 models (AC)	 2.2-16kW, 11 models (DC) 2.2-14kW, 10 models (AC)
Type	High Static Pressure Duct	Wall Mounted	Ceiling & Floor	Floor Standing	Fresh Air Processing Unit
Indoor Unit	 7.1-56kW, 12models	 2.2-9kW, 8 models	 3.6-16kW, 9 models (DC) 3.6-14kW, 8 models (AC)	 2.2-8kW, 7 models (DC)	 12.5-56kW, 7 models (DC)

Specification

Combinable Series

HP			8	10	12	14
Model name			MV8-252WV2GN1 (MA)	MV8-280WV2GN1 (MA)	MV8-335WV2GN1 (MA)	MV8-400WV2GN1 (MA)
Power supply			V/N/Hz	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)
Cooling ¹	Capacity	kW	25.2	28.0	33.5	40.0
		kBtu/h	85.9	95.5	114.2	136.4
	Power input	kW	5.3	6.6	8.2	9.8
	EER			4.76	4.25	4.11
Cooling(T3) ¹	Capacity	kW	24.3	27.0	31.7	37.2
		kBtu/h	82.8	91.9	107.9	126.9
	Power input	kW	5.7	7.1	8.6	10.2
	COP			4.28	3.87	3.82
Heating ²	Capacity	kW	27.0	31.5	37.5	45.0
		kBtu/h	92.1	107.4	127.9	153.5
	Power input	kW	5.3	6.4	8.3	10.2
	COP			5.12	4.89	4.51
Connected indoor unit	Total capacity		50%-130%	50%-130%	50%-130%	50%-130%
	Maximum quantity		13	16	19	23
Refrigerant	Type		R410A	R410A	R410A	R410A
	Factory charge	kg	7	7	7	8
Pipe connections ³	Liquid pipe	mm	Φ12.7	Φ12.7	Φ12.7	Φ15.9
	Gas pipe	mm	Φ25.4	Φ25.4	Φ25.4	Φ28.6
Sound pressure level ⁴		dB(A)	56	57	59	59
Sound power level ⁴		dB(A)	83	84	85	86
Net dimensions (W×H×D)		mm	940×1760×825			
Packed dimensions (W×H×D)		mm	1005×1945×890			
Net weight		kg	195	195	195	218
Gross weight		kg	213	213	213	236
Ambient temp.	Cooling	°C	-15°C ~ 55°C			
operation range	Heating	°C	-30°C ~ 30°C			

HP			16	18	20	22
Model name			MV8-450WV2GN1 (MA)	MV8-500WV2GN1 (MA)	MV8-560WV2GN1 (MA)	MV8-615WV2GN1 (MA)
Power supply			V/N/Hz	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)
Cooling ¹	Capacity	kW	45.0	50.0	56.0	61.5
		kBtu/h	153.5	170.5	191.0	209.7
	Power input	kW	11.4	12.7	15.0	17.3
	EER			3.95	3.93	3.73
Cooling(T3) ¹	Capacity	kW	41.3	45.6	52.1	56.8
		kBtu/h	140.9	155.4	177.5	193.5
	Power input	kW	11.0	12.4	14.3	15.8
	COP			3.75	3.69	3.64
Heating ²	Capacity	kW	50.0	56.0	63.0	69.0
		kBtu/h	170.5	191.0	214.8	235.3
	Power input	kW	11.5	13.5	15.3	17.6
	COP			4.36	4.16	4.13
Connected indoor unit	Total capacity		50%-130%	50%-130%	50%-130%	50%-130%
	Maximum quantity		26	29	33	36
Refrigerant	Type		R410A	R410A	R410A	R410A
	Factory charge	kg	8	8.4	9.3	9.3
Pipe connections ³	Liquid pipe	mm	Φ15.9	Φ15.9	Φ15.9	Φ15.9
	Gas pipe	mm	Φ28.6	Φ28.6	Φ28.6	Φ28.6
Sound pressure level ⁴		dB(A)	60	61	62	62
Sound power level ⁴		dB(A)	86	88	89	89
Net dimensions (W×H×D)		mm	940×1760×825			1340×1760×825
Packed dimensions (W×H×D)		mm	1005×1945×890			1405×1945×890
Net weight		kg	218	218	277	277
Gross weight		kg	236	236	297	297
Ambient temp.	Cooling	°C	-15°C ~ 55°C			
operation range	Heating	°C	-30°C ~ 30°C			

- Notes:
- Indoor air temperature 27°C DB, 19°C WB; outdoor air temperature 35/46°C(T1/T3) DB; equivalent refrigerant piping length 5m with zero level difference.
 - Indoor air temperature 20°C DB; outdoorair temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 5m with zero level di erence.
 - Diameters given are those of the unit's stop valve.
 - Sound pressure level is measured at aposition 1m in front of the unit and 1.3m above the oor in a semi-anechoicchamber.

Specification

Combinable Series

HP			24	26	28	30
Model name			MV8-670WV2GN1 (MA)	MV8-730WV2GN1 (MA)	MV8-785WV2GN1 (MA)	MV8-850WV2GN1 (MA)
Power supply			V/N/Hz	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)
Cooling ¹	Capacity	kW	67.0	73.0	78.5	85.0
		kBtu/h	228.5	248.9	267.7	289.9
	Power input	kW	18.6	20.8	23.6	26.6
	EER			3.60	3.51	3.32
Cooling(T3) ¹	Capacity	kW	61.3	66.8	71.0	77.6
		kBtu/h	208.9	227.7	242.0	264.6
	Power input	kW	18.1	19.1	20.9	22.9
	COP			3.39	3.50	3.40
Heating ²	Capacity	kW	75.0	81.5	87.5	95.0
		kBtu/h	255.8	277.9	298.4	324.0
	Power input	kW	19.0	20.8	24.0	27.1
	COP			3.95	3.92	3.65
Connected indoor unit	Total capacity		50%-130%	50%-130%	50%-130%	50%-130%
	Maximum quantity		39	43	46	50
Refrigerant	Type		R410A	R410A	R410A	R410A
	Factory charge	kg	12	19	19	21
Pipe connections ³	Liquid pipe	mm	Φ15.9	Φ22.2	Φ22.2	Φ22.2
	Gas pipe	mm	Φ28.6	Φ31.8	Φ31.8	Φ34.9
Sound pressure level ⁴		dB(A)	62	62	63	64
Sound power level ⁴		dB(A)	92	93	93	93
Net dimensions (W×H×D)		mm	1340×1760×825	1880×1760×825		
Packed dimensions (W×H×D)		mm	1405×1945×890	1945×1945×890		
Net weight		kg	297	380	380	419
Gross weight		kg	317	405	405	444
Ambient temp.	Cooling	°C	-15°C~55°C			
operation range	Heating	°C	-30°C~30°C			

HP			32	34	36	38	40
Model name			MV8-900WV2GN1(MA)	MV8-950WV2GN1(MA)	MV8-1010WV2GN1(MA)	MV8-1060WV2GN1(MA)	MV8-1120WV2GN1(MA)
Power supply			V/N/Hz	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)
Cooling ¹	Capacity	kW	90.0	95.2	101.0	106.0	112.0
		kBtu/h	306.9	324.6	344.4	361.5	381.9
	Power input	kW	29.5	31.7	34.0	36.4	39.9
	EER			3.05	3.00	2.97	2.91
Cooling(T3) ¹	Capacity	kW	81.0	86.4	90.3	94.0	100.1
		kBtu/h	276.2	294.7	307.8	320.6	341.3
	Power input	kW	24.6	26.7	28.3	30.5	33.1
	COP			3.29	3.24	3.18	3.08
Heating ²	Capacity	kW	100.0	106.0	112.0	119.0	123.5
		kBtu/h	341.0	361.5	381.9	405.8	421.1
	Power input	kW	29.4	31.7	33.9	37.0	39.1
	COP			3.40	3.34	3.30	3.22
Connected indoor unit	Total capacity		50%-130%	50%-130%	50%-130%	50%-130%	50%-130%
	Maximum quantity		53	56	59	62	64
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A
	Factory charge	kg	21	21	21	24	24
Pipe connections ³	Liquid pipe	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2	Φ22.2
	Gas pipe	mm	Φ34.9	Φ34.9	Φ34.9	Φ34.9	Φ34.9
Sound pressure level ⁴		dB(A)	64	66	66	67	67
Sound power level ⁴		dB(A)	93	94	94	94	94
Net dimensions (W×H×D)		mm	1880×1760×825				
Packed dimensions (W×H×D)		mm	1945×1945×890				
Net weight		kg	419	420	420	440	440
Gross weight		kg	444	445	445	465	465
Ambient temp.	Cooling	°C	-15°C~55°C				
operation range	Heating	°C	-30°C~-30°C				

- Notes:
- Indoor air temperature 27°C DB, 19°C WB; outdoor air temperature 35/46°C(T1/T3) DB; equivalent refrigerant piping length 5m with zero level difference.
 - Indoor air temperature 20°C DB; outdoorair temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 5m with zero level di erence.
 - Diameters given are those of the unit's stop valve.
 - Sound pressure level is measured at aposition 1m in front of the unit and 1.3m above the oor in a semi-anechoicchamber.

Specification

Individual Series

HP			8	10	12	14
Model name			MV8i-252WV2GN1 (MA)	MV8i-280WV2GN1 (MA)	MV8i-335WV2GN1 (MA)	MV8i-400WV2GN1 (MA)
Power supply			V/N/Hz	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)
Cooling(T1) ¹	Capacity	kW	25.2	28.0	33.5	40.0
		kBtu/h	85.9	95.5	114.2	136.4
	Power input	kW	5.5	6.9	8.5	10.4
	EER		4.60	4.05	3.96	3.83
Cooling(T3) ¹	Capacity	kW	24.3	27.0	31.7	37.2
		kBtu/h	82.8	91.9	107.9	126.9
	Power input	kW	5.9	7.4	9.0	11.0
	EER		4.14	3.63	3.53	3.40
Heating ²	Capacity	kW	27.0	31.5	37.5	45.0
		kBtu/h	92.1	107.4	127.9	153.5
	Power input	kW	5.6	6.9	8.9	11.2
	COP		4.86	4.58	4.23	4.03
Connected indoor unit	Total capacity		50%-130%	50%-130%	50%-130%	50%-130%
	Maximum quantity		13	16	19	23
Refrigerant	Type		R410A	R410A	R410A	R410A
	Factory charge	kg	7	7	7	7
Pipe connections ³	Liquid pipe	mm	Φ12.7	Φ12.7	Φ12.7	Φ12.7
	Gas pipe	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4
Sound pressure level ⁴		dB(A)	56	57	59	59
Sound power level ⁴		dB(A)	83	84	85	86
Net dimensions (WxHxD)		mm	940×1760×825			
Packed dimensions (WxHxD)		mm	1005×1945×890			
Net weight		kg	195	195	195	198
Gross weight		kg	213	213	213	216
Ambient temp. operation range	Cooling	°C	-15°C~-55°C			
	Heating	°C	-30°C~30°C			

HP			16	18	20	22
Model name			MV8i-450WV2GN1 (MA)	MV8i-500WV2GN1 (MA)	MV8i-560WV2GN1 (MA)	MV8i-615WV2GN1 (MA)
Power supply			V/N/Hz	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)
Cooling(T1) ¹	Capacity	kW	45.0	50.0	56.0	61.5
		kBtu/h	153.5	170.5	191.0	209.7
	Power input	kW	12.2	13.8	16.0	18.1
	EER		3.70	3.62	3.50	3.39
Cooling(T3) ¹	Capacity	kW	41.3	45.6	52.1	56.8
		kBtu/h	140.9	155.4	177.5	193.5
	Power input	kW	12.5	14.0	16.3	18.5
	EER		3.31	3.25	3.19	3.08
Heating ²	Capacity	kW	50.0	56.0	63.0	69.0
		kBtu/h	170.5	191.0	214.8	235.3
	Power input	kW	12.6	14.4	16.4	18.7
	COP		3.97	3.88	3.83	3.69
Connected indoor unit	Total capacity		50%-130%	50%-130%	50%-130%	50%-130%
	Maximum quantity		26	29	33	36
Refrigerant	Type		R410A	R410A	R410A	R410A
	Factory charge	kg	8	8.4	9.3	9.3
Pipe connections ³	Liquid pipe	mm	Φ15.9	Φ15.9	Φ15.9	Φ15.9
	Gas pipe	mm	Φ28.6	Φ28.6	Φ28.6	Φ28.6
Sound pressure level ⁴		dB(A)	60	61	62	62
Sound power level ⁴		dB(A)	86	88	89	89
Net dimensions (WxHxD)		mm	940×1760×825		1340×1760×825	
Packed dimensions (WxHxD)		mm	1005×1945×890		1405×1945×890	
Net weight		kg	218	218	277	277
Gross weight		kg	236	236	297	297
Ambient temp. operation range	Cooling	°C	-15°C~-55°C			
	Heating	°C	-30°C~30°C			

- Notes:
- Indoor air temperature 27°C DB, 19°C WB;outdoor air temperature 35/46°C(T1/T3) DB; equivalent refrigerant piping length 5m with zero level difference.
 - Indoor air temperature 20°C DB; outdoorair temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 5m with zero level di erence.
 - Diameters given are those of the unit's stop valve.
 - Sound pressure level is measured at aposition 1m in front of the unit and 1.3m above the floor in a semi-anechoicchamber.

Specification

Individual Series

HP			24	26	28	30	32
Model name			MV8i-670WV2GN1 (MA)	MV8i-730WV2GN1 (MA)	MV8i-785WV2GN1 (MA)	MV8i-850WV2GN1 (MA)	MV8i-900WV2GN1 (MA)
Power supply			V/N/Hz	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)
Cooling(T1) ¹	Capacity	kW	67.0	73.0	78.5	85.0	90.0
		kBtu/h	228.5	248.9	267.7	289.9	306.9
	Power input	kW	19.8	22.3	24.5	27.2	30.5
	EER		3.38	3.27	3.20	3.12	2.95
Cooling(T3) ¹	Capacity	kW	61.3	66.8	71.0	77.6	81.0
		kBtu/h	208.9	227.7	242.0	264.6	276.2
	Power input	kW	20.1	22.7	24.8	27.8	30.5
	EER		3.05	2.94	2.86	2.80	2.66
Heating ²	Capacity	kW	75.0	81.5	87.5	95.0	100.0
		kBtu/h	255.8	277.9	298.4	324.0	341.0
	Power input	kW	20.2	22.1	25.4	28.5	30.4
	COP		3.72	3.68	3.44	3.33	3.29
Connected indoor unit	Total capacity		50%-130%	50%-130%	50%-130%	50%-130%	50%-130%
	Maximum quantity		39	43	46	50	53
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A
	Factory charge	kg	9.3	19	19	21	21
Pipe connections ³	Liquid pipe	mm	Φ15.9	Φ22.2	Φ22.2	Φ22.2	Φ22.2
	Gas pipe	mm	Φ28.6	Φ31.8	Φ31.8	Φ34.9	Φ34.9
Sound pressure level ⁴		dB(A)	62	62	63	64	64
Sound power level ⁴		dB(A)	92	93	93	93	93
Net dimensions (WxHxD)		mm	1340×1760×825	1880×1760×825			
Packed dimensions (WxHxD)		mm	1405×1945×890	1945×1945×890			
Net weight		kg	279	380	380	419	419
Gross weight		kg	299	405	405	444	444
Ambient temp. operation range	Cooling	°C	-15°C~-55°C				
	Heating	°C	-30°C~30°C				

HP			34	36	38	40	42
Model name			MV8i-950WV2GN1 (MA)	MV8i-1010WV2GN1 (MA)	MV8i-1060WV2GN1 (MA)	MV8i-1120WV2GN1 (MA)	MV8i-1170WV2GN1 (MA)
Power supply			V/N/Hz	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)	380-415/3/50(60)
Cooling(T1) ¹	Capacity	kW	95.2	101.0	106.0	112.0	117.0
		kBtu/h	324.6	344.4	361.5	381.9	399.0
	Power input	kW	32.8	35.4	37.7	40.7	43.3
	EER		2.90	2.85	2.81	2.75	2.70
Cooling(T3) ¹	Capacity	kW	86.4	90.3	94.0	100.1	103.8
		kBtu/h	294.7	307.8	320.6	341.3	353.9
	Power input	kW	33.1	35.0	37.6	40.7	43.0
	EER		2.61	2.58	2.50	2.46	2.41
Heating ²	Capacity	kW	106.0	112.0	119.0	123.5	130.0
		kBtu/h	361.5	381.9	405.8	421.1	443.3
	Power input	kW	32.9	35.4	38.3	40.1	42.8
	COP		3.22	3.16	3.11	3.08	3.04
Connected indoor unit	Total capacity		50%-130%	50%-130%	50%-130%	50%-130%	50%-130%
	Maximum quantity		56	59	62	64	64
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A
	Factory charge	kg	21	21	24	24	24
Pipe connections ³	Liquid pipe	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2	Φ22.2
	Gas pipe	mm	Φ34.9	Φ34.9	Φ34.9	Φ34.9	Φ34.9
Sound pressure level ⁴		dB(A)	66	66	67	67	68
Sound power level ⁴		dB(A)	94	94	94	94	94
Net dimensions (WxHxD)		mm	1880×1760×825				
Packed dimensions (WxHxD)		mm	1945×1945×890				
Net weight		kg	420	420	440	440	442
Gross weight		kg	445	445	465	465	467
Ambient temp. operation range	Cooling	°C	-15°C~-55°C				
	Heating	°C	-30°C~30°C				

- Notes:
- Indoor air temperature 27°C DB, 19°C WB;outdoor air temperature 35/46°C(T1/T3) DB; equivalent refrigerant piping length 5m with zero level difference.
 - Indoor air temperature 20°C DB; outdoorair temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 5m with zero level di erence.
 - Diameters given are those of the unit's stop valve.
 - Sound pressure level is measured at aposition 1m in front of the unit and 1.3m above the floor in a semi-anechoicchamber.